


Sweating Guarded Hotplate Integrated System (iSGHP)

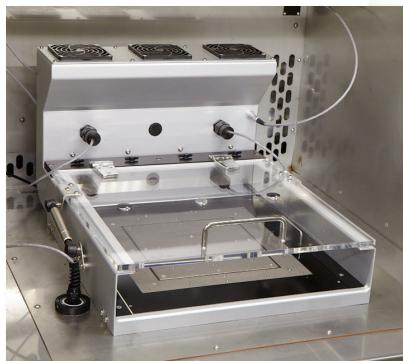

The Sweating Guarded Hotplate, or "Skin Model", is used to produce accurate, repeatable measurements of thermal resistance (R_{ct}) and vapor permeability (R_{et}) for textiles as per ISO 11092, ASTM F1868, and ASTM D1518 (Option II).

The iSGHP-8.2 and iSGHP-10.5 systems include hotplate with integral sweating surface, computer controlled variable airflow rates, gravity fed fluid supply system, and ambient temperature and humidity probes.

The system's integrated chamber features an insulated stainless steel interior and a compact, space-efficient design. Its ergonomic layout yields a comfortable working height of approximately 42" (107cm) above the floor, and other thoughtful touches include a high intensity LED cabinet light, a removable top shelf for the preconditioning of fabric samples, and a large insulated door with viewing window.

For sweating tests the SGHP hotplate utilizes the chamber's water source, and a unique porous wicking assembly on both hotplate and guard ring ensures a uniform wetted surface. Adjustable (motorized) plate height easily accommodates a variety of sample thicknesses, and our ThermDAC control and data logging software makes testing as simple as clicking the mouse and walking away.

ASSOCIATED TEST METHODS

- ISO 11092, ISO 13029
- ASTM F1868, ASTM D1518 (Option II). Mesh fabric hood is available for Option I method.
- GB/T 11048, CEN/TR 16422:2012

FEATURES AT A GLANCE

- Electronics-grade copper test plate and guard ring with ultra-stable resistance wire heating for uniform heat flux.
- Systems include two ambient temperature sensors, one RH sensor, and one air velocity sensor.
- Gravity fed fluid supply regulates flow volume for any sample.
- Chamber can be integrated to the SGHP-8.2 or SGHP-10.5 hotplate, as per customer requirements.
- 15°C to 55°C temperature range, stable to 0.1°C.
- 30% to 70% R.H. range (limited by dewpoint temperature).
- An optional de-ionizing water cartridge system allows chamber to use local tap water supply.
- Systems include a new Dell laptop PC with exclusive ThermDAC control software. This intuitive, user-friendly, Windows-based application provides full thermal control, fault detection, system configuration and calibration, real-time data display, and data logging capabilities.



Thermetrics

Sweating Guarded Hotplate, Integrated System (iSGHP)

SGHP Standard Specifications

- 8" square test plate with 2" guard ring (SGHP-8.2)
 - Specimen sample size 12"x12"
- 10" square test plate with 5" guard ring (SGHP-10.5)
 - Specimen sample size 20"x20"
- Electronics-grade copper test plate and guard ring
- Airflow hood with variable speed fan control
- Adjustable plate height accommodates a variety of sample thicknesses
- Dell laptop PC with ThermDAC control software
- Ultra-stable resistance wire heating
- Two ambient temperature sensors
- One RH sensor; one air velocity sensor
- Gravity-fed reservoir and fluid supply system
- One year warranty




SGHP Measurement Range and Accuracy

- Intrinsic thermal resistance range 0.002 to 2.0 K·m²/W
- Intrinsic evaporative resistance range 0 to 1000 Pa·m²/W
- ± 0.1°C temperature measurement
- ± 3% Relative humidity
- ± 2% Air velocity
- ± 1% Power measurement

ThermDAC Control Software

ThermDAC is a user-friendly, intuitive, Windows-based application providing full device control, fault detection, data logging and analysis capabilities. System configuration, calibration, and diagnostic functions can also be carried out within ThermDAC.

Several specific software features are included for our hotplate systems. User-defined tests allow operators to define non-standard test conditions and custom tolerance criteria. Multiple graph displays can be viewed, with zooming to view device or ambient conditions in detail. Real-time statistical functions can be applied to the test data over any user-selected time range.

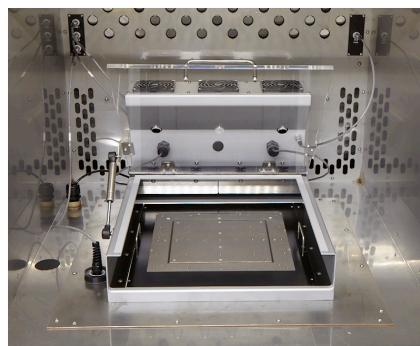

Chamber Specifications

- Water Supply: Demineralized or Distilled water (plumbed or reservoir models available)
- Optional DI filter cartridge for tap water supply
- Recirculating airflow stream is achieved by way of a plenum located behind the workspace
- Includes insulated door window and LED light
- ThermDAC software control
- Internal Dimensions: 30"W x 31"D x 25"H (76cm x 79cm x 63.5cm)
- External Dimensions: 36"W x 39"D x 70"H (91cm x 99cm x 178cm)
- Weight: 985 lbs (448 kg)
- Power Required: 220/240 VAC, 1 Phase 50/60 Hz at 30 Amps (Standard model)
- Recommended Circuit Breaker: 40 Amps
- One year warranty

Chamber Performance and Accuracy

- Steady-state temperature range: 15°C to 55°C
- 30% to 70% R.H. (limited by dewpoint temperature)
- ± 0.1°C Temperature
- ± 3% Relative Humidity