

THERMAL MANIKIN - ANDI

The World's Most Advanced Thermal Manikin

Environments are changing and garment technology is evolving. Our ANDI manikin was developed specifically to take on these challenges. Building on proven Thermetrics manikin technology, ANDI has the unrivaled ability to support advanced thermal protection and comfort research, including measurement of heat loss and heat gain, while adeptly responding to changing environmental conditions.


ANDI's Dynamic Heatflux Sensing capabilities measure the smallest transient events, which humans can feel, but traditional manikins have been unable to measure. Active Cooling technology prevents the manikin from overheating in hot conditions, expanding ANDI's temperature range to support the actual scenarios your garments are designed for.

All ANDI systems are complete, ready-to-use instruments including manikin, control electronics, laptop PC, and our exclusive ThermDAC control software. Just add your own climate chamber for a comprehensive testing solution.

Test Methods Supported

ANDI complies with

- ASTM F1291
- ASTM F1720
- ASTM F2370
- ASTM F2371
- ASTM F2732
- EN 13537
- EN 342 (requires walking stand)
- ISO 15831
- ISO 23537 (Part 1)

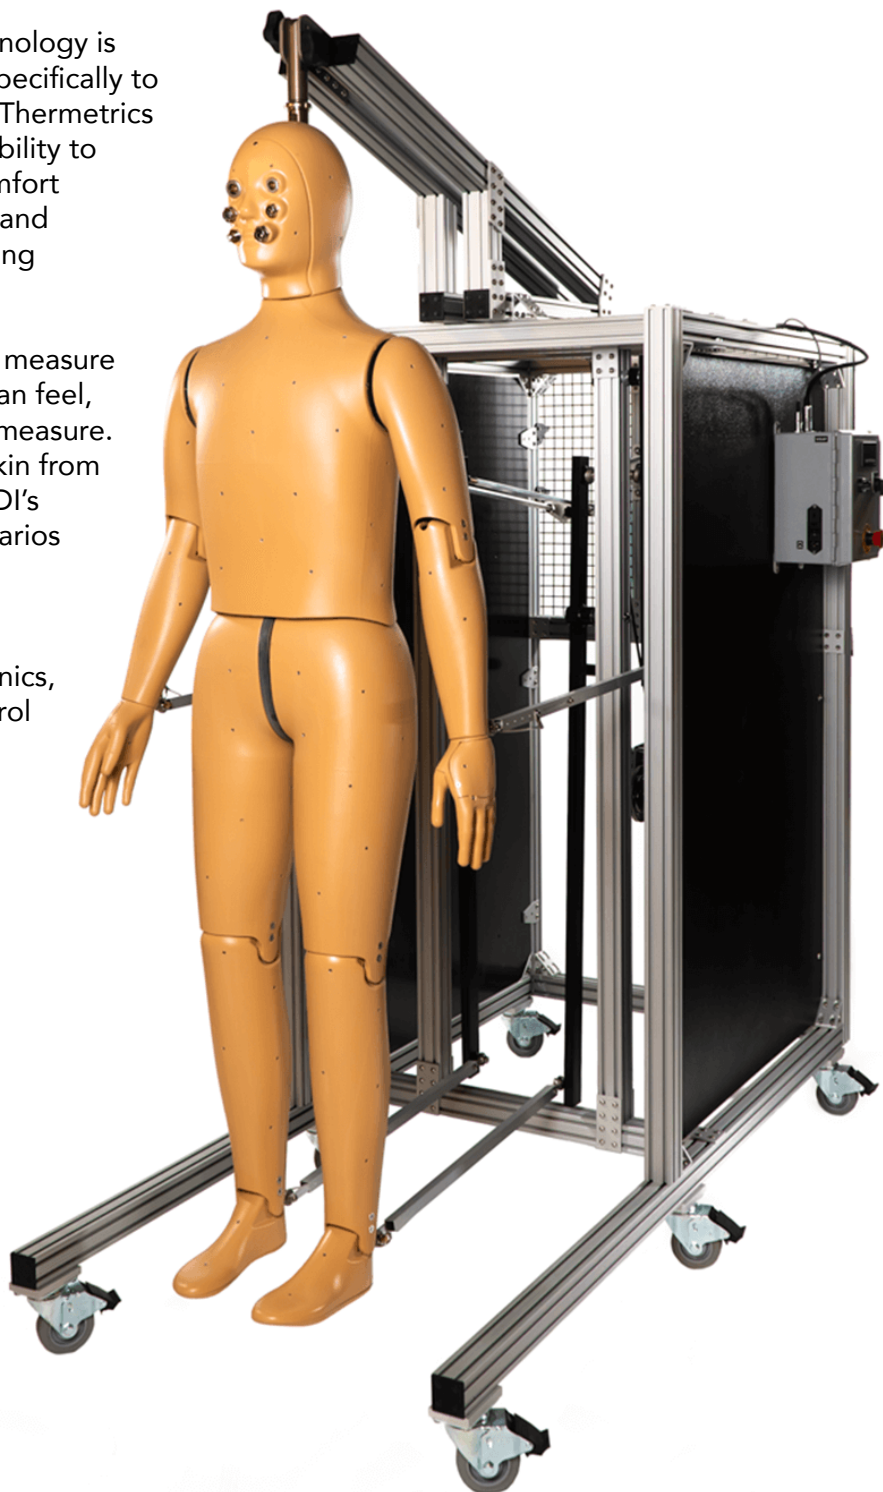



ANDI Specifications


- Male body form: height: 5 ft. 10 in./178.5cm
 - Chest: 37 in./94 cm
 - Waist: 33 in./84 cm
 - Hip: 39 in./99 cm
- Manikin weight: 77 lbs./35 kg
- Standard operating range: -20°C to +50°C
- Extended operating range: -40°C to +50°C (with “cold capable” option)
- 0 to 100% RH, including condensation
- Temperature accuracy: $\pm 0.1^{\circ}\text{C}$
- RH accuracy: $\pm 3\%$
- Sweating delivery range: 0-1,000 ml/hr
- Maximum heating output: 1,000 W/m²
- Continuous heat removal capacity: 350 W/m²
- Power: 208-265 VAC, 50/60Hz, Single-phase
- Power/communication cable length: 25 ft./7.5 m.

Base Products Include:

- Manikin body form with heaters and sensors
- Control electronics
- Two Ambient temperature sensors
- Laptop loaded with ThermDac control software
- Power and control cabling
- One relative humidity sensor
- One omni directional wind-speed sensor
- Recirculating chiller and supply tubes
- Manikin transport chair
- Standard one-year warranty

ANDI Feature Highlights & Benefits

- Dynamic Heatflux Sensing (positive/negative) with active cooling provides real-time measurements of heat loss and gain
- 35 thermal zones, independent heaters, and distributed temperature sensors provide the ideal density of measurements
- Replicate multiple testing positions with poseable joints at shoulders, hips, elbows, knees, and ankles
- Variable flow sweating system’s high-density pore network with removable fabric skin allows for flow rate customizations by zone
- Active cooling simulates human body mass without requiring a real weight manikin
- Measure boundary conditions to ensure repeatability (ambient temperature, relative humidity, and windspeed)
- Easily go from raw measurements to workable data with our customizable ThermDAC user interface software; optional ManikinPC physiological control

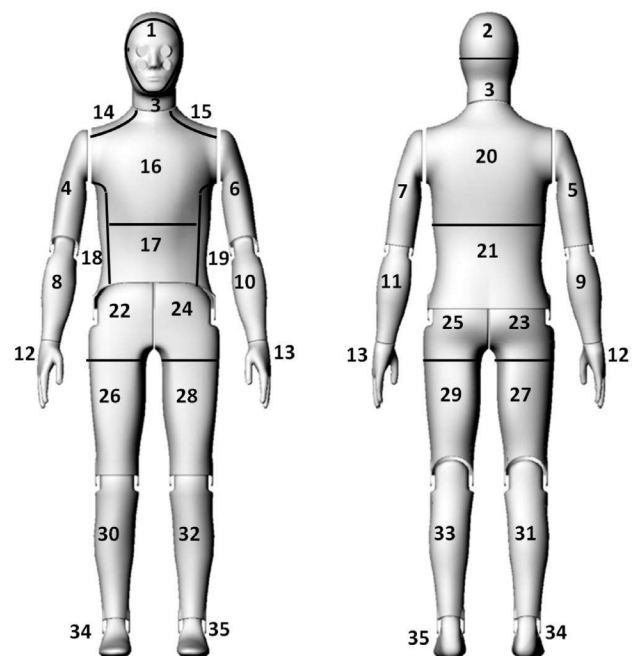

Standard thermal zone schematics



ThermDAC Control Software

ThermDAC is an engineered user interface for thermal manikin systems providing real-time device control, automated testing, and flexible display and logging capabilities, including:

- Manikin control by skin temperature, constant heat flux, comfort equation, ManikinPC
- User-programmable test configurations, stability criteria, linked work cycles
- Automatic steady-state detection
- Color-coded manikin pictorial displays, selectable for any manikin variable
- Zoomable time-history graph of multiple device and ambient variables
- Real-time statistical analysis over any user-selected time range
- Logging of raw data, statistical analysis, user-reports
- Device calibration and fault detection




4D

PHYSIOLOGY & COMFORT MODEL INTEGRATION

Bring your manikin to life with the next dimension in testing; ManikinPC

- Real-time data
- Reduce dependence on human testing
- Shorten design cycles
- Design based on comfort metrics

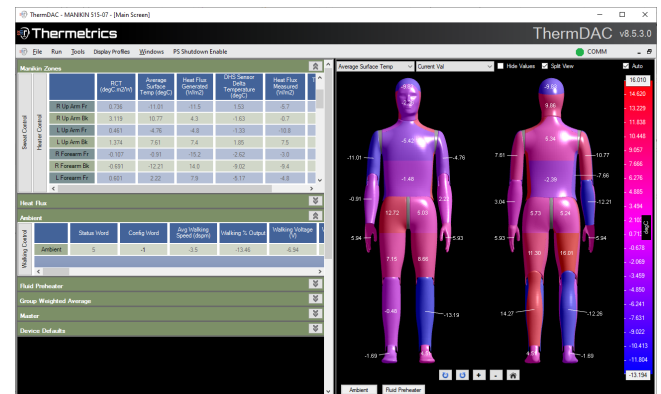

515 - ANDI	Description	Product Name	Item #
Base Products	ANDI Manikin, 35Z, Dry/Active Cooling, Male 178.5 cm	515.d35.M	19-51502
	ANDI Manikin, 35Z, Sweating/Active Cooling, Male 178.5 cm	515.s35.M	19-51501
Standard Options	Walking Stand, 120VAC	—	20-00341
	Walking Stand, 240VAC	—	20-00340
	Hanging Stand	—	20-00222
	ASTM Cal Garment, Set, ANDI	—	20-00880
	Software, ManikinPC License (Permanent)	—	11-01407/ 11-03396
Custom Options	Non-Humidified Breathing System	—	19-00001
	Humidified Breathing System	—	19-00002
	Hanging Stand, Back Mount	—	20-00846
	Walking Stand, Back Mount, 120VAC	—	20-00848
	Walking Stand, Back Mount, 240VAC	—	XX-XXXX
	Cold Capable (Extended range to -40oC)	—	XX-XXXX



Don't see what you need above? Contact Thermetrics to customize your perfect system.

Keep your ANDI in tip-top shape. Discuss service plan options and point-of-sale discounts with us at sales@thermetrics.com.

